SWITCHES

MICRO SWITCHES

Switch type - SPDT PCB Mount, Lever action
Contact rating - 5A @ 250V AC
Contact resistance - <30m? ?
Mounting hole diameter - 1.2mm



Part Number
SM-05S-01P

Switch type - SPDT Momentary
Contact rating - 3A @ 125V AC
Contact resistance - <15m? ?



Part Number
S3250

LEVER ACTUATED MICRO SWITCH

Switch type - SPDT Momentary
Contact rating - 6A @ 250V AC
Contact resistance - <15m? ?



Part Number
S3260

PUSH BUTTON MICRO SWITCH

Switch type - SPDT Momentary
Contact rating - 6A @ 250V AC
Contact resistance - <15m? ?
Mounting hole diameter - 10mm



Part Number
S3255

Economy Type, Miniature size
20 x 10mm
5 Amp, 250V AC

Part Number
MS10

Economy Type, Miniature size lever action
20 x 10mm
5 Amp, 250V AC

Part Number
MS12

Economy Type, Standard size
28 x 15mm
5 Amp, 250V AC

Part Number
MS20

Economy Type, Standard size lever action
28 x 15mm
5 Amp, 250V AC



Part Number
MS22

KEY SWITCHES

General purpose panel mount key switches. Two keys supplied with each switch. Rated 2A @ 250V AC.

Panel hole 19mm, length 27.5mm from rear of front shroud, 33.6mm overall depth, 61mm depth with key inserted, including terminals. Overall diameter 22m.



Connection Details					
2 Position Type			3 Position Type		
	Pole 1	Pole 2		Pole 1	Pole 2
	Makes to:	Makes to:		Makes to:	Makes to:
Pos. 1	8, 1	4, 5	Pos. 1	3, 4	7, 8
Pos. 2	1, 3	5, 7	Pos. 2	4, 5	8, 1
			Pos. 3	5, 6	1, 2

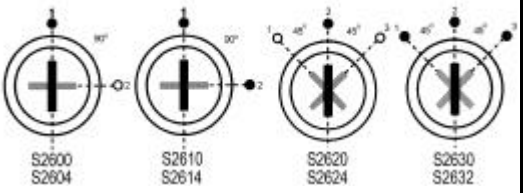

TWO POLE TWO POSITION

Key removable in left hand position only

Part Number	Type
S2600	Random Keyed
S2604	Common Keyed (606 key)

Key removable in either position.

Part Number	Type
S2610	Random Keyed
S2614	Common Keyed (606 key)
S2513	Blank Key to suit S2600 - S2632

TWO POLE THREE POSITION

Key removable in centre position only.

Part Number	Type
S2620	Random Keyed
S2624	Common Keyed (606 key)

Key removable in all positions.

Part Number	Type
S2630	Random Keyed
S2632	Common Keyed (606 key)
S2513	Blank Key to suit S2600 - S2632

CAM LOCKS

Key removable in either position. Panel hole 19mm, length from rear of front shroud to cam lever 16mm, overall depth with key inserted 55mm. Supplied with 2 keys.

S2560 As S2550 but to suit commonly keyed 8004 key. Removable in either position. Panel hole 19mm, length from rear of front shroud to cam lever 23mm. Supplied with 2 8004 keys.

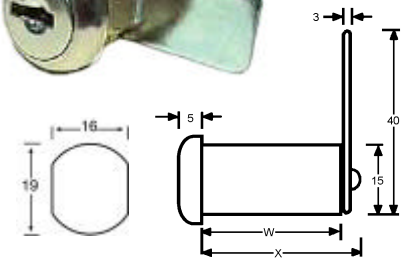

Part Number	W	X	Type
S2550			Random Keyed
S2552			Key to Suit S2550
S2560	14.5	23	8004 Keyed 22mm
S2570	21	30	8004 Keyed 29mm

TWO POSITION KEYSWITCH

Silver plated contacts and terminals. Rated at 3A @ 250V AC. Key removable in both positions. Supplied with two keys. Panel hole 19mm, length from rear of front shroud 41.5mm, 50mm overall, overall depth with key inserted 77mm, including terminals.





Part Number	Type
S2500	SPST Type
S2501	SPDT Type
S2512	Blank Key to Suit

TUBULAR KEYSWITCHES - STANDARD

Standard. DPST. Radial type tumbler mechanism. Silver plated contacts and terminals. Rated at 2A @ 250V AC. Key removable in both positions. Supplied with two keys. Four terminals. Panel hole 19mm, length from rear of front shroud 30.5mm, 37mm overall, overall depth with key inserted 69mm, including terminals.



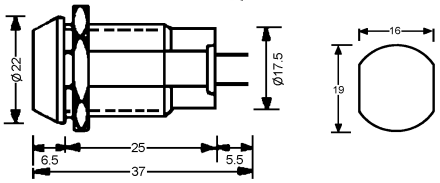

Part Number	Type
S2515	Standard Key Switch

TUBULAR KEYSWITCHES - MINI

Mini. DPST. Radial type tumbler mechanism. Silver plated contacts and terminals. Rated at 0.5A @ 240V AC. Key removable in both positions. Supplied with two keys. 15mm diameter, overall length 20mm, overall depth with key inserted 49mm, including terminals. Mounting hole 12mm. Four terminals, two sets of changeover contacts.



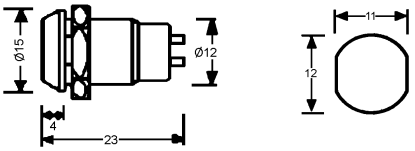

Part Number	Type
S2520	Mini Key Switch
S2518	Blank Key to Suit

PH (03) 9873 3555 FAX (03) 9873 3355