



MAINS TRANSFORMERS

25V + 25V & 14.5V 72VA EI-CORE TRANSFORMER

Primary Voltage - 240V AC
 Total VA rating - 72VA
 Insulation - Class E (120°C)
 Magnetising current - <25mA
 Temperature rise - <60°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1.6\text{kg}$

Approval Certificate No. CS/813/Q

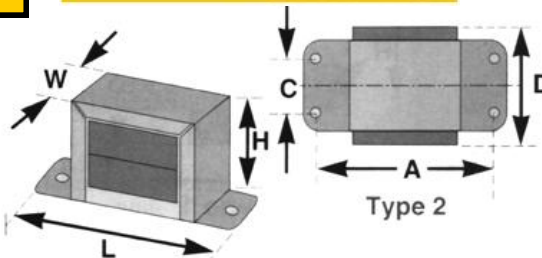

Size Type 2

Secondary Voltages Available:

14.5V 1A
 25V 1.4A
 25V 1.4A


Primary fitted with 200mm fly leads. Secondary taps have solder tags.

Part Number	A	D	L	W	H	C
M2160	83	87	72	53	60	24

9V - 24V, 5AMP, MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 60VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <65°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1.5\text{kg}$

Approval Certificate No. CS/813/Q



Size Type 2

Secondary Voltages Available :

9.0V : 5A* , 12V : 5A*
 12V : 2.5A , 15V : 2.5A
 21V : 2.5A , 24V : 2.5A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.


*Max Current when connected in parallel

Part Number	A	D	L	W	H	C
M2165	83	86	69	53	60	24

12V - 30V, 120VA, MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 120VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <75°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - 2.5kg

Approval Certificate No. CS/813/Q



Size Type 3

Secondary Voltages Available :
 12V : 8A* , 15V : 8A*
 24V : 4A , 27V : 4A
 30V : 4A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.

*Max Current when connected in parallel


Part Number	A	D	L	W	H	C	F
M2175	92	83	60	68	75	30	

POWER IRAN

6V - 15V, 2A, MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 30VA
 Insulation - Class E (120°C)
 Magnetising current - <65mA
 Temperature rise - <60°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1\text{kg}$

Approval Certificate No. CS/814/Q



Size Type 1

Secondary Voltages
 6V : 2A , 9V : 2A
 12V : 2A , 15V : 2A


Primary fitted with 200mm fly leads. Secondary taps have solder tags.

Part Number	A	D	L	W	H
M2156	84	70	69	40	60

9V - 24V, 6AMP MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 72VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <65°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - 1.5kg

Approval Certificate No. CS/813/Q



Size Type 2

Secondary Voltages Available :
 9V : 6A* , 12V : 6A*
 15V : 3A , 18V : 3A
 21V : 3A , 24V : 3A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.



*Max Current when connected in parallel

Part Number	A	D	L	W	H	C
M2166	82	77	68	53	60	23

24V, 3AMP SINGLE WINDING

Primary Voltage - 240V AC
 Total VA rating - 72VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <65°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1.6\text{kg}$

Approval Certificate No. CS/814/Q




Size Type 2

Secondary Voltages
 24V : 3A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.



Part Number	A	D	L	W	H	C
M2158	83	87	72	53	60	24

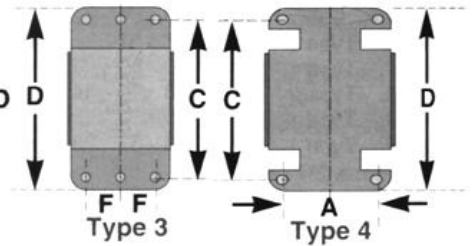

15V - 30V, 2AMP MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 60VA
 Insulation - Class E (120°C)
 Magnetising current - <80mA
 Temperature rise - <65°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1.5\text{kg}$

Approval Certificate No. CS/813/Q



Size Type 1

Secondary Voltages
 15V : 2A , 17.5V : 2A
 20V : 2A , 24V : 2A
 27.5V : 2A , 30V : 2A



Primary fitted with 200mm fly leads. Secondary taps have solder tags.

Part Number	A	D	L	W	H	C
M6674	76	80	69	53	57	23

12V - 30V, 6AMP MULTI-TAPPED

Primary Voltage - 240V AC
 Total VA rating - 100VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <70°C
 Regulation - $\leq 14\%$
 Recommended AC fuse - 500mA
 Weight - $\approx 1.6\text{kg}$

Approval Certificate No. CS/813/Q



Size Type 2

Secondary Voltages
 12V : 6A* , 15V : 6A*
 24V : 3A , 27V : 3A
 30V : 3A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.



*Max Current when

Part Number	A	D	L	W	H	C
M2170	88	80	79	46	69	28

24V, 5AMP SINGLE WINDING

Primary Voltage - 240V AC
 Total VA rating - 120VA
 Insulation - Class E (120°C)
 Magnetising current - <85mA
 Temperature rise - <65°C
 Regulation - $\leq 10\%$
 Recommended AC fuse - 500mA
 Weight - 2.19kg

Approval Certificate No. CS/990/Q



Size Type 4

Secondary Voltages
 24V : 5A

Primary fitted with 200mm fly leads. Secondary taps have solder tags.

Part Number	A	D	L	W	H	C
M2190	70	100	88	45	73	88